



INSTRUCTIONS FOR USE

Product Reference: PCL07 series comprising the following garments:
TG4890 Shirt, **TG4891** Trousers and **TG4899** Apron

Composition: Cotton

Protective clothing for industrial workers exposed to heat – EN ISO 11612:2015 A1, A2, B1, C1, F1



Please read these instructions carefully before use. Refer to the garment label for information on the corresponding standards.



2895

The garment bears the CE mark to demonstrate compliance with the requirements of PPE Regulation (EU) 2016/425.



The garment bears the UKCA mark to demonstrate compliance with the requirements of PPE Regulation (EU) 2016/425 as brought into UK law and amended.

Important Recommendations

- Prior to performing work associated with certain risks, always consult your safety officer regarding the appropriate personal protective equipment.
- Only wear garments of a suitable size. Products that are too loose or too tight will restrict movement and not provide the optimum level of protection.
- The garment must be worn fully fastened.
- The garment is designed to be worn in combination with personal protective equipment of equal or greater protection that complies with EN ISO 11612, and for full body protection suitable additional protective equipment shall be used (helmet with protective face screen, protective gloves and footwear (boots)).
- Information given in the care label should be followed. The manufacturer cannot be held liable in the case of improper or incorrect use.
- Dirty clothing may lead to a reduction in protection. Should the garment become irrecoverably soiled or contaminated, replace the item with a new one.
- It is not recommended that these products are used in a situation where they become damaged by abrasion, tearing, cutting etc.
- Damaged garments should not be repaired, and instead replaced with a new garment.
- Discarded items should be disposed of in accordance with local waste disposal rules.
- To reduce the risk of contamination, do not wash in a domestic environment.
- No modification e.g. adding logos must be made to these garments or this may invalidate the CE and UKCA certification of this product.

Storage: Do not store in strong, direct sunlight.

Maintenance: Clothing shall be cleaned regularly in accordance with the manufacturer's recommendations. After cleaning, the clothing shall be visually inspected for any sign of damage.

Aftercare: The manufacturer will not accept liability for garments where care labels have been ignored, defaced or removed.

Care Labelling



EN ISO 11612:2015 Clothing to protect against heat and flame

This type of protective clothing is to provide protection where there is a requirement for limited flame spread properties, and where the user may be exposed to convective, radiant or contact heat.

A1 A2 B1 C1 F1

The garment meets the following performance levels:

Code Letter A1 Limited flame spread (A1 surface ignition)

Code Letter A2 Limited flame spread (A2 edge ignition)

Code Letter B1 Convective heat (level B1 lowest, level B3 highest)

Code Letter C1 Radiant heat (level C1 lowest, level C4 highest)

Code Letter F1 Contact heat (level F1 lowest, level F3 highest)

Intended Uses

These garments can be used as protective garments for industrial workers exposed to heat & thermal risk – EN ISO 11612:2015. This includes, but not limited to:

- Utility industries.
- General industrial applications,
- Plastic moulding and processing (medium duty),
- Thermal treatment operations (low duty), and
- Domestic use.

The above intended uses are recommendations, but it is up to the end user to decide suitability of the product for the intended application.

Limitations of Use


- The garment may not eliminate all risk of burns.
- In the event of an accidental splash of chemical or flammable liquids, the wearer shall immediately withdraw and carefully remove the garments, ensuring that the chemical or liquid does not come into contact with the skin. The clothing shall then be cleaned and removed from service.
- Limited flame spread properties will be reduced if the garment is contaminated with flammable liquids.
- The garment is not intended to protect against molten aluminium or molten iron splashes.

Sizing Information

Apron is available in one size only.


Fit shirts according to chest size. Sizes given are in cm.

Size	Chest (B)	Height (A)
S	92-96	167-173
M	102-106	170-176
L	112-116	173-179
XL	122-126	176-182
2XL	132-136	185+
3XL	142-146	185+
4XL	152-156	185+
5XL	162-166	185+
6XL	172-176	185+

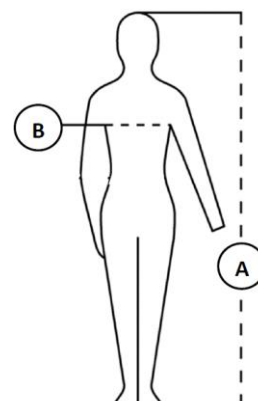

Fit trousers according to waist size. Sizes given are in cm.

Size	Waist (B)	Height (A)
S	76-80	167-173
M	84-88	170-176
L	92-96	173-179
XL	100-104	176-182
2XL	108-112	185+
3XL	116-120	185+
4XL	124-128	185+
5XL	132-140	185+

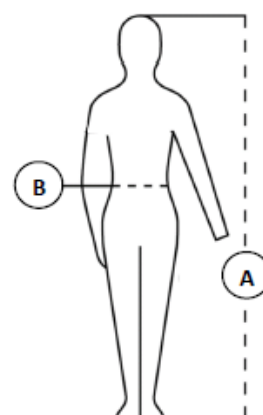

EU Module B type-examination (certificate number **SH01321**) and EU Module D assessment (certificate number **SH01365**) carried out by Shirley Technologies Europe Limited, Sky Business Centre, Port Tunnel Business Park, Office 13, Unit 1, Clonsaugh Business and Technology Park, Dublin 17, ROI (Notified Body Number 2895).

UKCA Module B type-examination (certificate number **524311**) and UKCA Module D assessment (certificate number **54219**) carried out by BTTG Testing and Certification Ltd., Unit 14, Wheel Forge Way, Trafford Park, Manchester, M17 1EH, United Kingdom (Approved Body Number 0338).